BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of the work: **Estimate for Construction of RCC Drain from Saibaba Temple to Raghavendra Temple, HMT Layout in Ward No. 09 (Vidyaranyapura) Vidyaranyapura Sub Division.**

							Estimate Cost:		5000000.00
Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
1	KSRRB 300-1. Earth work excavation by manual means in ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications MORTH chapter 3. **Page No. 142 / Item No. 19.1 / PWD SR 2016-17**	Cum							
	9th Main Road Sapthagiri Layout		1	187.00	2.00	1.95	729.30		
	Basic Rate	82.00					**729.30**	199.36	**145397.00**
	Add loading and unloading Charges **It No 17.1 KSRRB M 100-1**	68.00							
	Average weight of earth 1.28 tonne / kg for 11.90 Km = 1.28 T X 11.90Km X 2.5 Tonne / km = 38.08	38.08							
		188.08							
	Area Weightage @ 6%	11.28							
	Total	**199.36**							
2	KSRB 4-1.2 : Providing and laying in position **plain cement concrete of mix 1:3:6** with OPC cement @ 220kgs, with 40mm and down size graded granite metal coarse aggregates @0.892cum and fine aggregates @ 0.465cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, **in foundation** including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2. **(P.No. 12/I.No. 4.2 of CSR 2016-17)**	Cum							
			1	187.00	2.00	0.20	74.80		
	Basic Rate	5046.00					**74.80**	5348.76	**400087.00**
	Area Weightage @ 6%	302.76							
	Total	**5348.76**							
3	Providing and laying cement concrete using 20mm and down size granite jelly of ready mixed concrete (RMC)for R.C.C works laid in 15cms thick layers and well compacted vibrating, curing, finishing with necessary cement mortar, form works and scaffoldings to withstand pumping of concrete, with all lead and lifts etc., complete (exclusive of cost of steel and fabrication charges.) Ready mixed Cement concrete M-20 (1:1.5:3) for raft foundation, column footing, main and secondary beams. **Page No. 18 / Item No. 4.48 / PWD SR 2016-17**	Cum							
a	Drain Bottom Concrete		1	187.00	2.00	0.20	74.80		
	Side Wall		2	187.00	0.20	1.50	112.20		
	Basic Rate	5879.00					**187.00**	6231.74	**1165335.00**
	Area Weightage @ 6%	352.74							
	Total	**6231.74**							

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
4	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 **TMT Bars FE 500 Page No. 17 / Item No. 4.46.2 / PWD SR 2016-17**	Tonne							
	For Drain @ 80 Kg / Cum		0.08	187.00			**14.96**	64243.42	**961082.00**
	Basic Rate	60607.00							
	Area Weightage @ 6%	3636.42							
	Total	**64243.42**							
5	KSRB 4-6.4 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for **vertical surface such as walls** at any thickness, including attached pilasters, buttresses, plinth and string courses cost of all materials, labour complete as per specifications. Specification NO KBS 4.6.2 **Page No. 15 / Item No. 4.31 / PWD SR 2016-17**	Sqm							
	Side Wall		4	187.00		1.55	1159.40		
	Basic Rate	293.00					**1159.40**	310.58	**360086.00**
	Area Weightage @ 6%	17.58							
	Total	**310.58**							
6	Providing **precast slab of 250mm thick** including cost of all materials, labour, curing, transportation, loading unloading, etc., complete as per the direction of engineer in charge- Data rate	Sqm							
	For Covering Slab		1	187.00		2.00	374.00		
							374.00	5125.00	**1916750.00**
	Sub Total								**4948737.00**
	For Third Part QC inspection Charges @ 1%								**49487.00**
	Miscellaneous and other Charges	L/S							**1776.00**
								Total	**5000000.00**
	Rupees Fifty Lakh(s) Only								

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2016-17.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
Ward No. 69

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidayaranyapura Sub Division

ADMINISTRATIVELY SANCTIONED FOR Rs..... 50,00 lakhs
Rupees fifty lakhs only

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

Under Jobcode 009-18-000052

Registered as EE ( ) ..... 9.....9.....
Subject to conditions contained in
enclosed memo EE ( ) No ...../91...
Dt .....
J.C(4)BBMP/AS/03/18-19 Estimate A/S Sanctioned
dated 27-8-2018 Rs 50.00 lakhs

Technical Sanction
Accorded For .....
Head of A/C.....
CER NO :..... Dt:.../

TA

CE (YNK)

Joint Commissioner
(Yelahanka Zone)

BEL 3rd block

Lake area

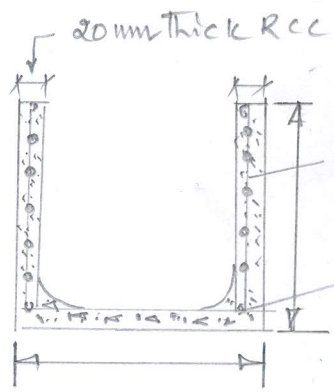

* C/s at A-A

old POST office

NTL L/Y 8th main Road

AE-9